





10L-30
1760 R.P.M.

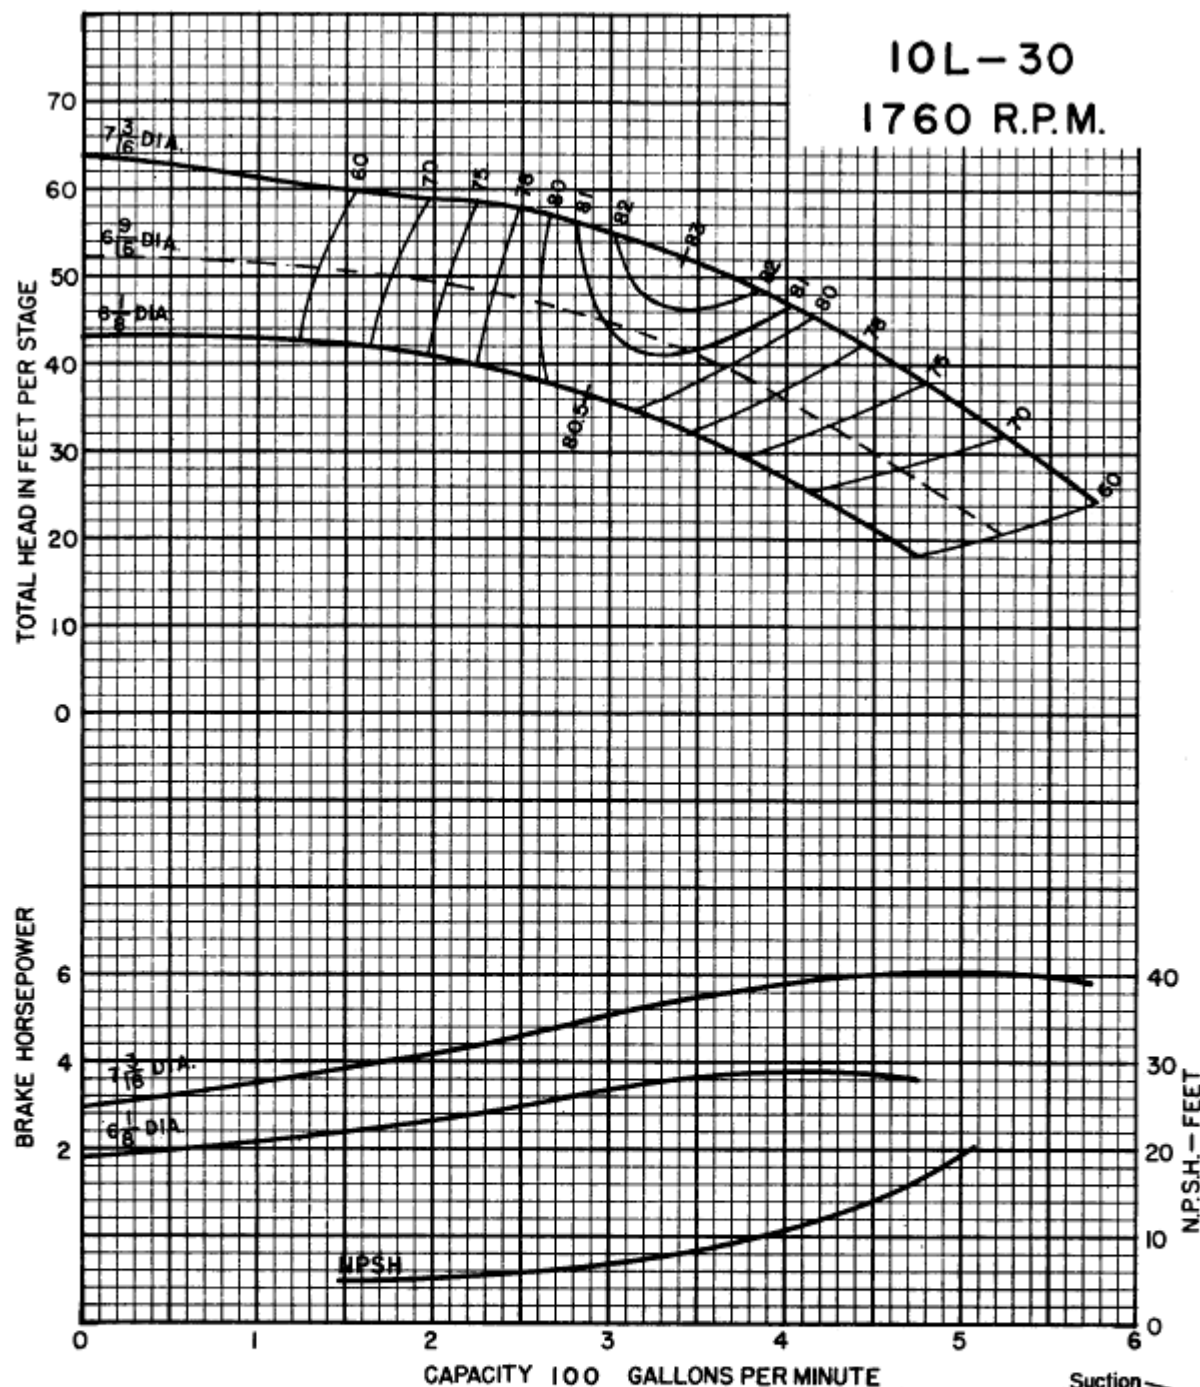

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages or other materials change efficiency as shown.

No. of stages	Eff. change	MATERIAL	Eff. change	Standard materials
6	—	Impeller—bronze	—	Impeller—bronze
5	—	Impeller—c.i.	—	Bowl—cast iron/enamelled
4	—	Impeller—c.i.enm.	—	Thrust factor
3	—1	Bowl—c.i.enm.	—	Rotor wt. per stage (lbs.)
2	—2	Bowl—cast iron	—	Bowl wt. 1st stage (lbs.)
1	—3	Bowl—bronze	—	Bowl wt. add'l. stage (lbs.)
				Max. bowl horsepower
				Impeller eye area (sq.in.)

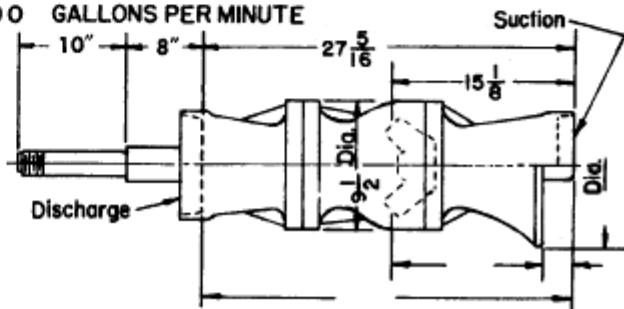

For additional stages add $7\frac{1}{4}$ per stage.

Column pipe	5
Suction pipe	5
Impeller shaft diameter	1.5

ALH-8063