



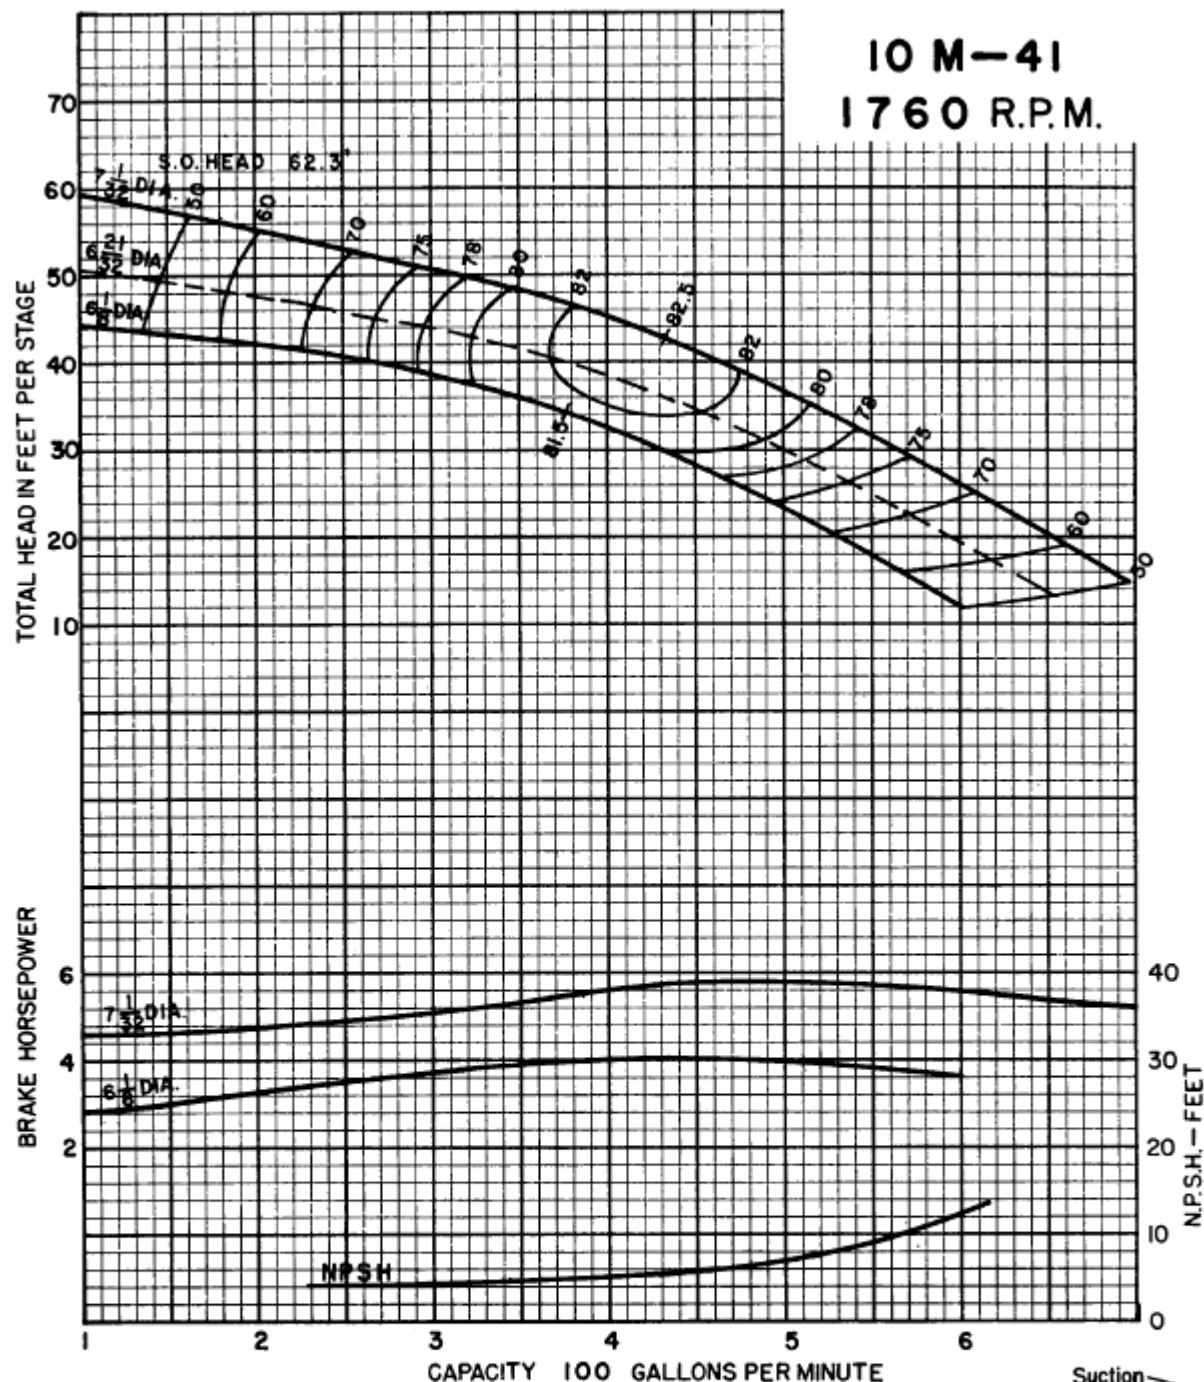

Efficiency shown is for 4 stages or more, with standard materials. For fewer stages or other materials change efficiency as shown.

No. of stages	Eff. change	MATERIAL	Eff. change	Standard materials	
				Impeller—bronze	
6	—	Impeller—bronze		Bowl—cast iron/enamelled	
5	—	Impeller—c.i.		Thrust factor	5.5
4	—	Impeller—c.i.enm.		Rotor wt. per stage (lbs.)	15.5
3	—	Bowl—c.i.enm.		Bowl wt. 1st stage (lbs.)	17.5
2	—	Bowl—cast iron		Bowl wt. add'l. stage (lbs.)	60
1	—	Bowl—bronze		Max. bowl horsepower	14.0
				Impeller eye area (sq.in.)	11.2

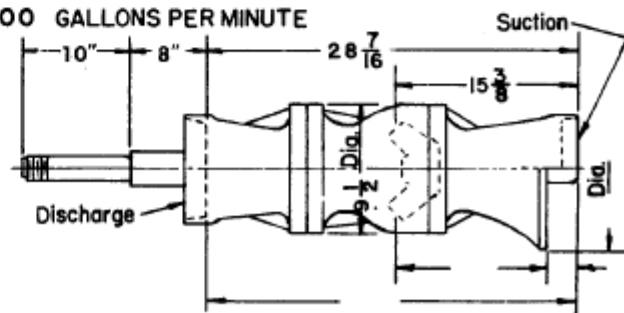

For additional stages add $8 \frac{1}{4}$ per stage.

Column pipe	6	5
Suction pipe	6	
Impeller shaft diameter	1.5	

ALH - 8047