
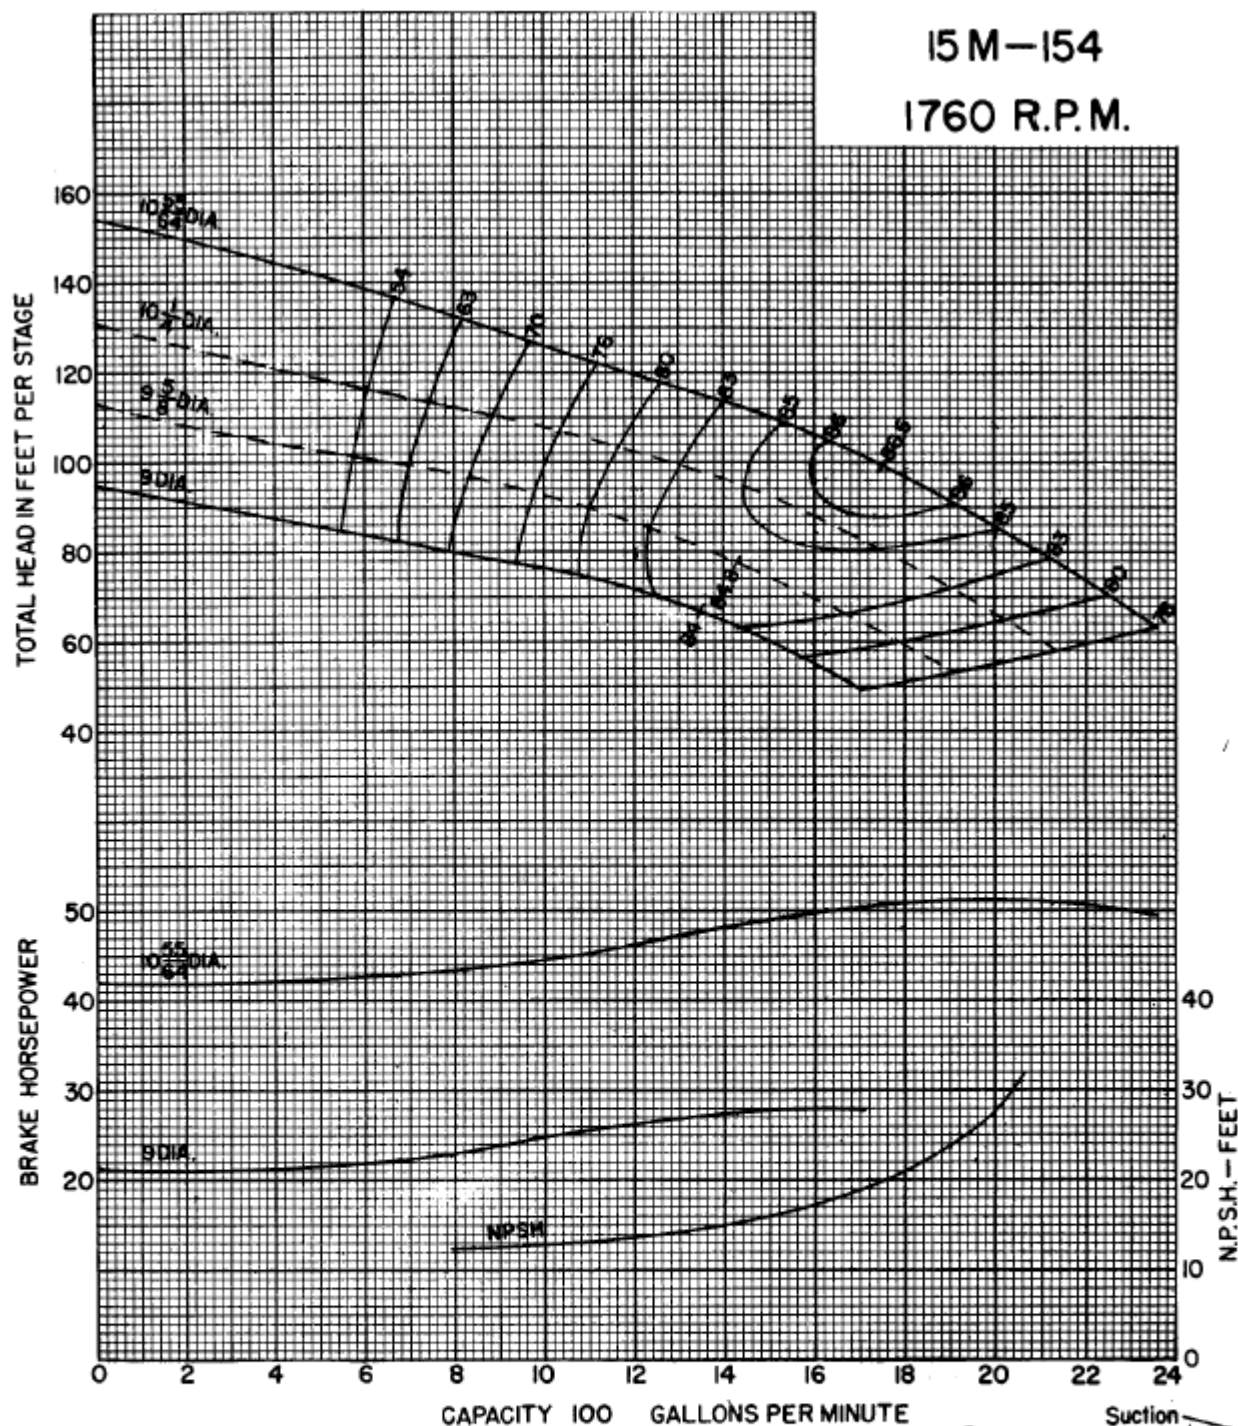



15 M-154
1760 R.P.M.


Efficiency shown is for 4 stages or more, with standard materials. For fewer stages or other materials change efficiency as shown.

No. of stages	Eff. change	MATERIAL	Eff. change	Standard materials	
				Impeller—bronze	Bowl—cast iron/enamelled
6	—	Impeller—bronze		Thrust factor	12.12
5	—	Impeller—c.i.		Rotor wt. per stage (lbs.)	55.2
4	—	Impeller—c.i.enm.		Bowl wt. 1st stage (lbs.)	427
3	-0.5	Bowl—c.i.enm.		Bowl wt. add'l. stage (lbs.)	172
2	-2.0	Bowl—cast iron		Max. bowl horsepower	570
1	-5.0	Bowl—bronze		Impeller eye area (sq.in.)	26.7

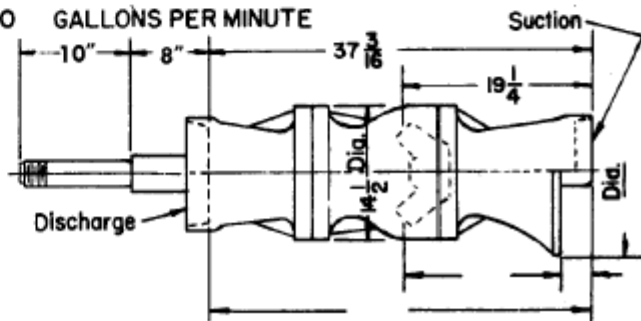

For additional stages add $12\frac{3}{4}$ " per stage.

Column pipe	10 8
Suction pipe	10
Impeller shaft diameter	2.25

ALH-8027