GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER

PROJECT	SERVICE	GPM CAPACITY	FT. TDH	% EFFICIENCY	RPM

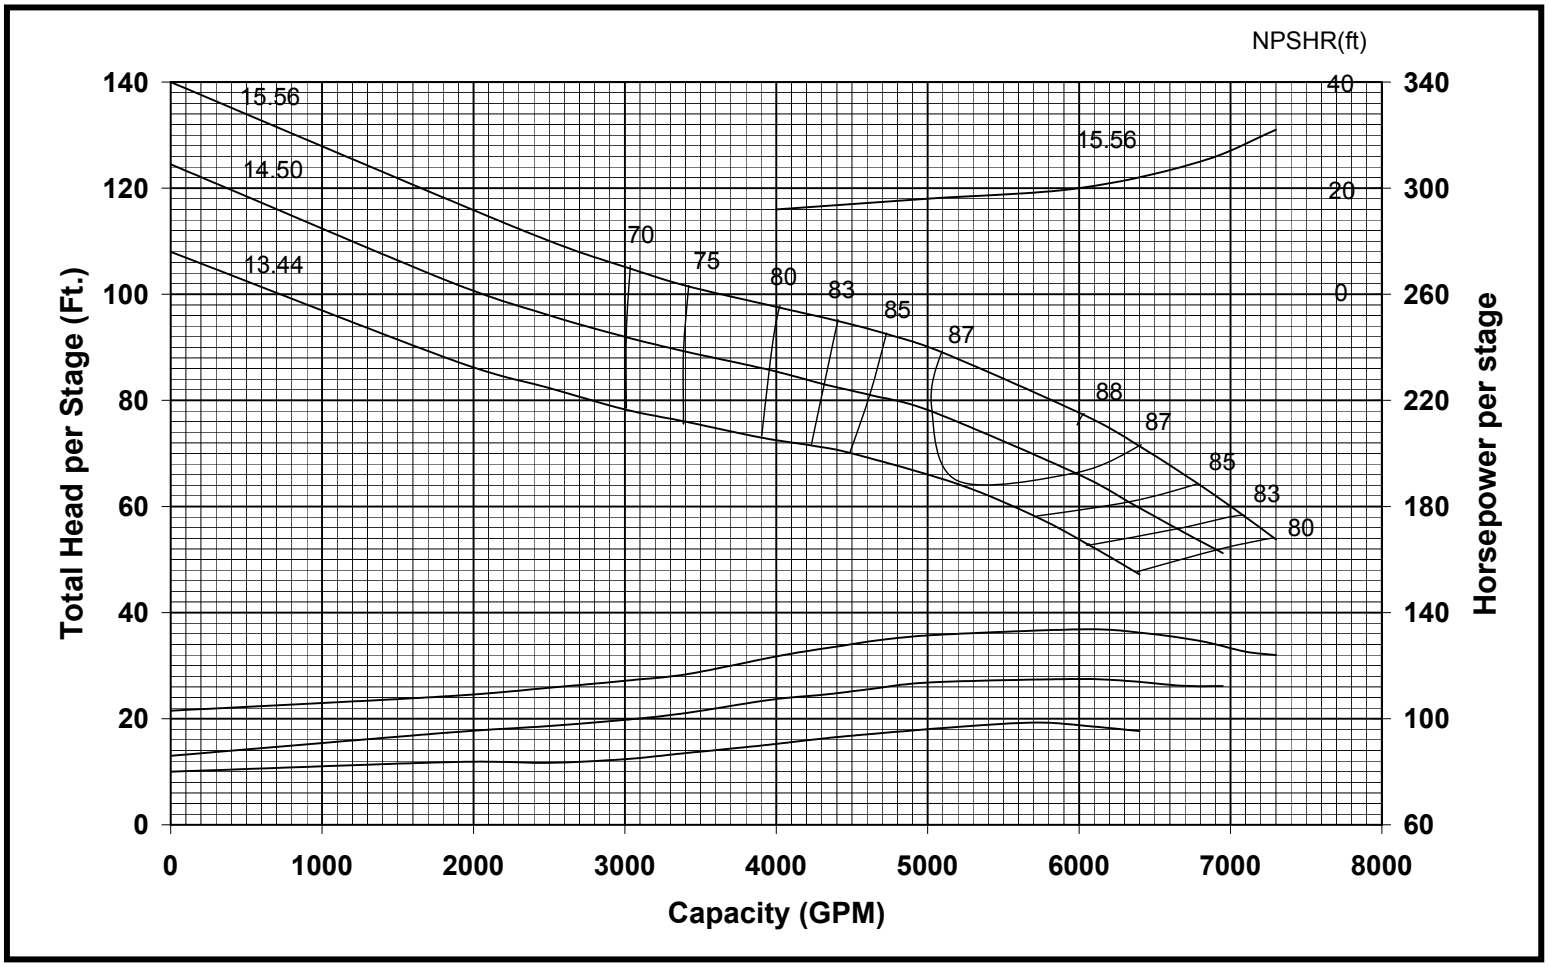

Curve No.	**E6624EDPC2**
Model	**24ELC**
RPM	**1180**
EFFIEIENCY CORRECTION	
1-STAGE	
2-STAGE	
3-STAGE	
Bal. Imps.	-2.0
Impeller	**ENCLOSED**
Ns =	**3538**
K =	**42.0 LBS/FT**
K (Bal.)=	**10.5 LBS/FT**
Bowl O.D.	22.25"
Bowl Lateral	0.87"
Max. PSI	344
Min. Subm	42"

GOULDS PUMPS

TURBINE OPERATIONS

Lubbock, Texas

BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARATEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.

8/6/2003