


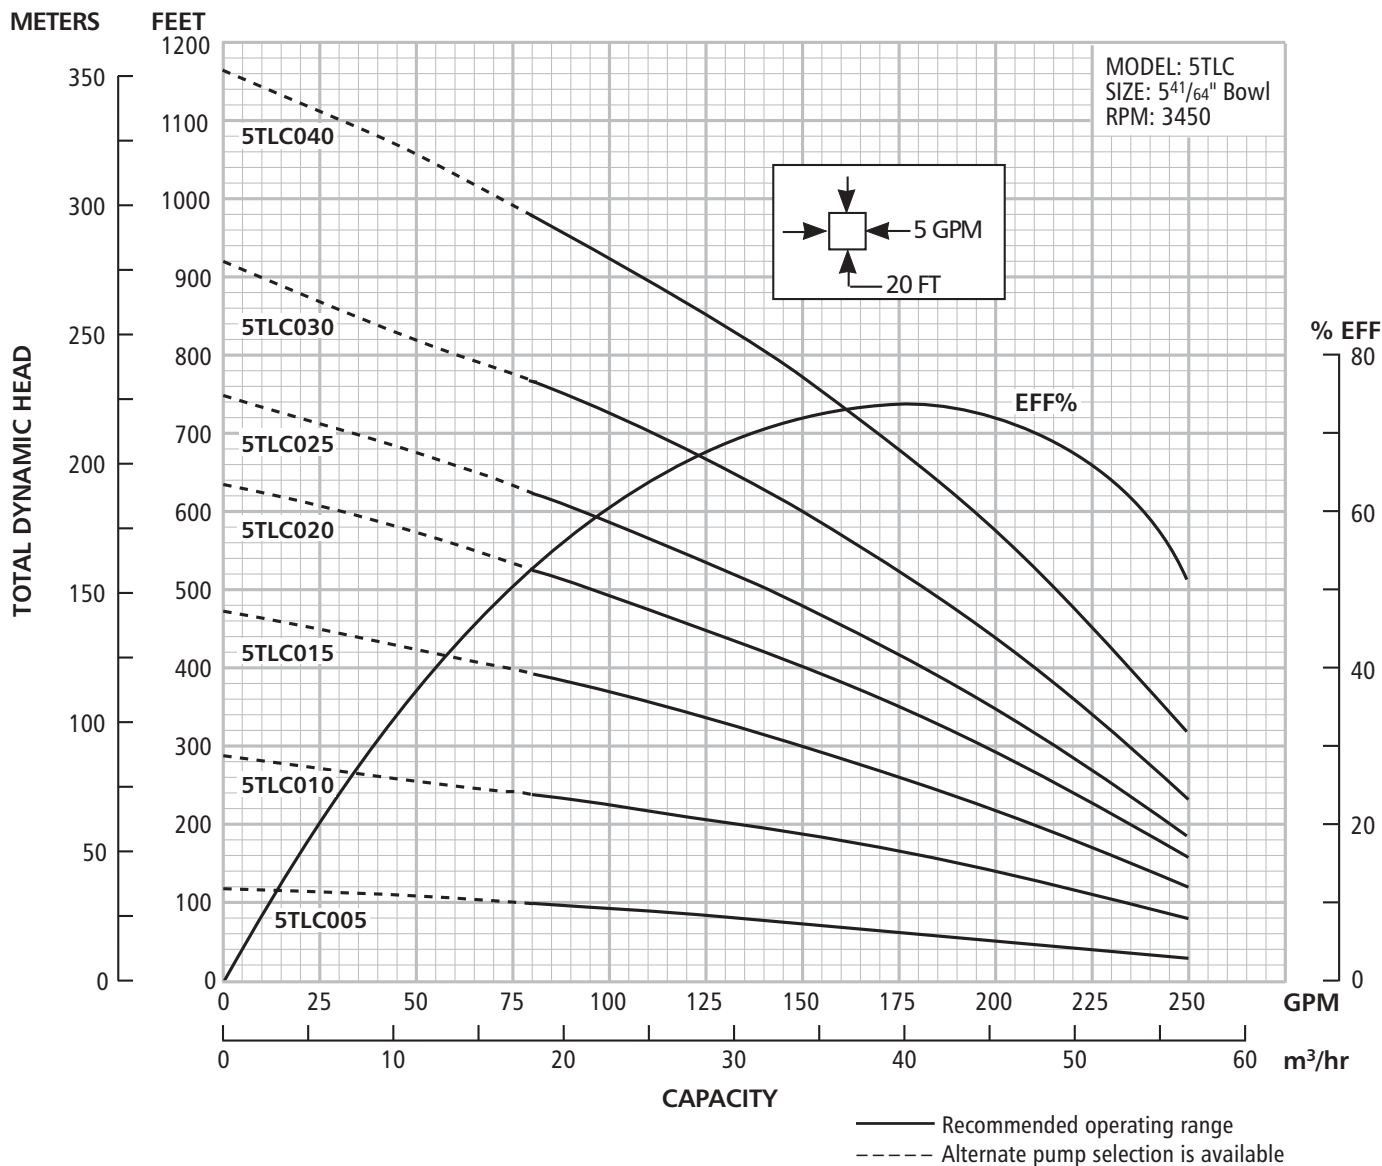


DIMENSIONS AND WEIGHTS

HP	Stages	W.E. Order Number	W.E. Length	W.E. Wt. (lbs.)
5	2	05TLC00544CTB	20.9	57
		05TLC00564CTB	23.3	62
10	5	05TLC01064CTB	37.6	101
15	8	05TLC01564CTB	52.0	140
20	11	05TLC02064CTB	66.5	179
25	13	05TLC02564CTB	76.0	205
30	16	05TLC03064CTB	90.6	244
40	20	05TLC04064CTB	109.8	296

(All dimensions in inches and weights in lbs. Do not use for construction purposes.)


PLEASE NOTE:

- Order motors separately.
- For intermediate horsepower pumps consult factory.
- Solid line is recommended operating range. The dotted line (-----) signifies an alternate pump selection is available.
- Please specify all options changes in W.E. order number.

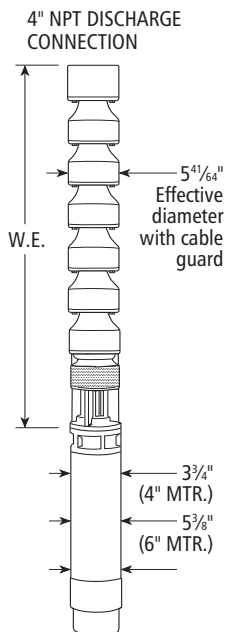

MATERIALS OF CONSTRUCTION

Part Name	Material
Shaft	ASTM A582 TYPE 416
Coupling	ASTM A582 S41600 CD
Suction Adapter	Ductile Iron ASTM A536
Discharge Bowl	ASTM A48 CL 30B
Bronze Bearings	ASTM B584
Discharge Bowl Bearing	ASTM B584
Taperlocks	ASTM A108 GR 101B
Bowl	ASTM A48 CL 30B
Upthrust Collar	Polyethylene
Impeller	ASTM B584
Fasteners	SAEJ429 GR 8
Cable Guard	ASTM A240 S 30400
Suction Strainer	ASTM A240 S 30400

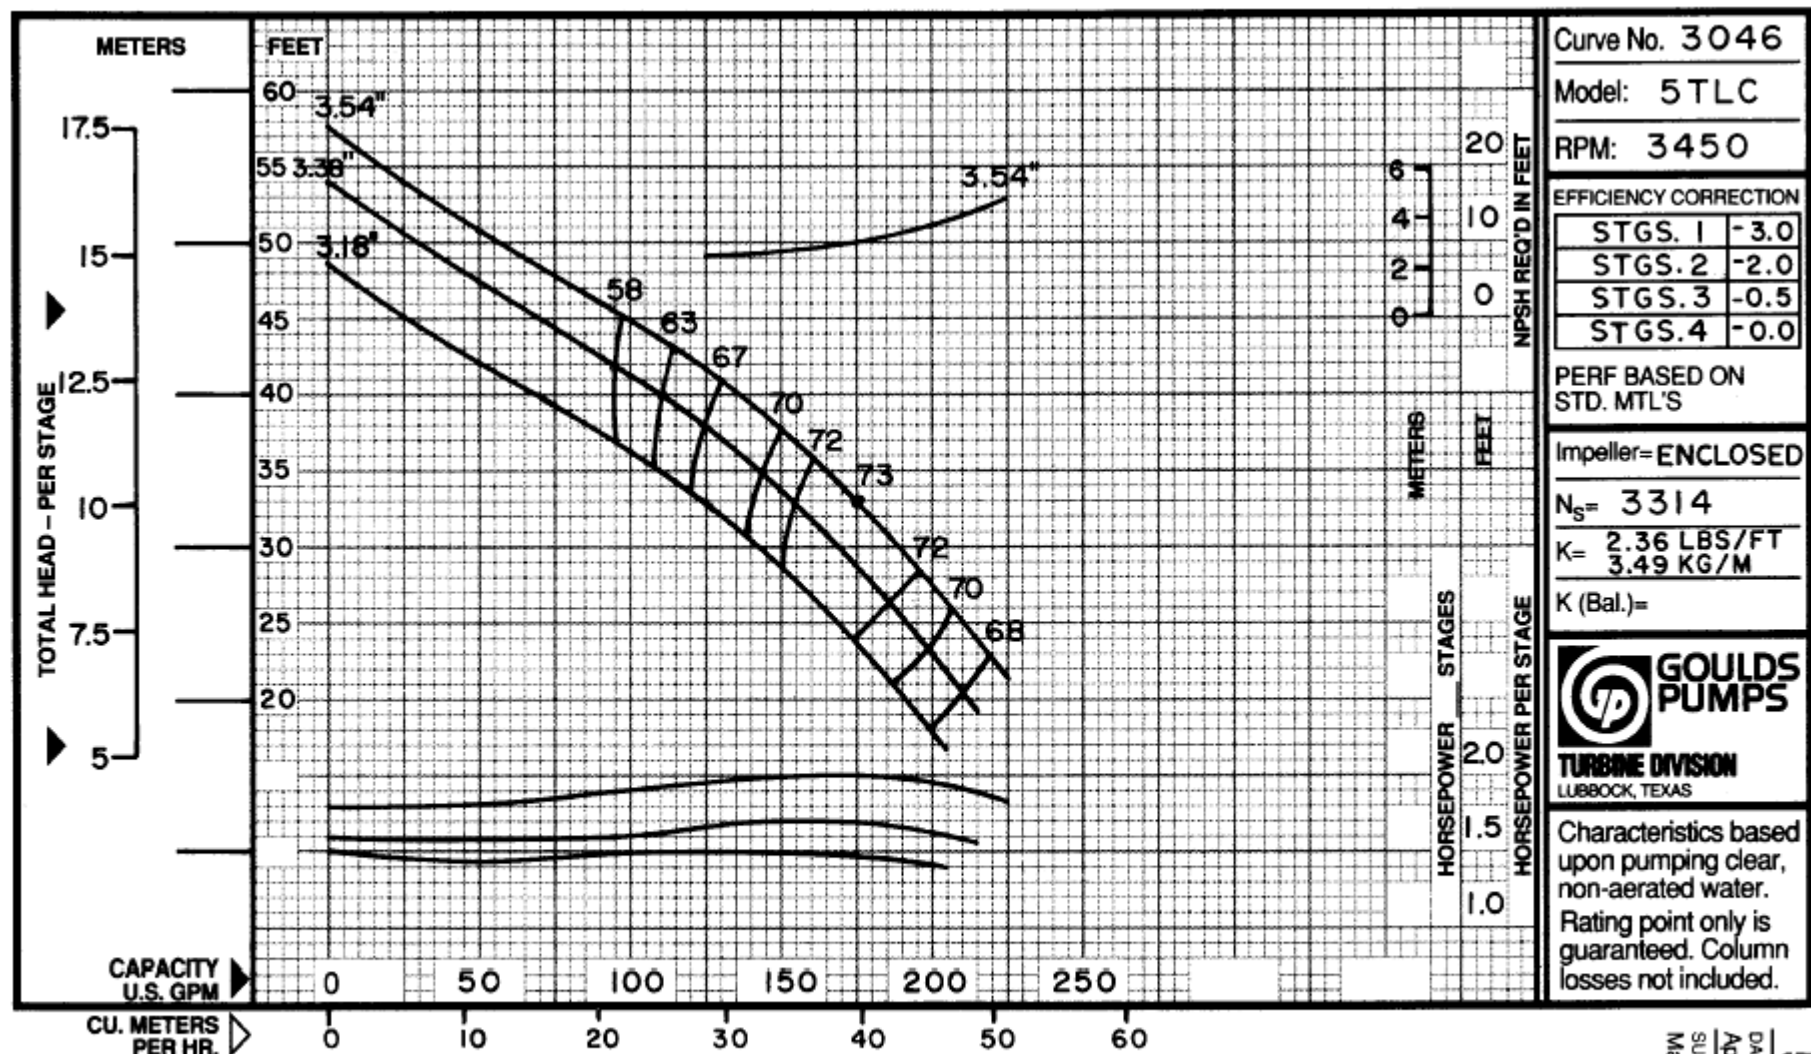

MODEL
5TLC
 DATE
 April, 1994
 SUPERCEDES
 May, 1993