


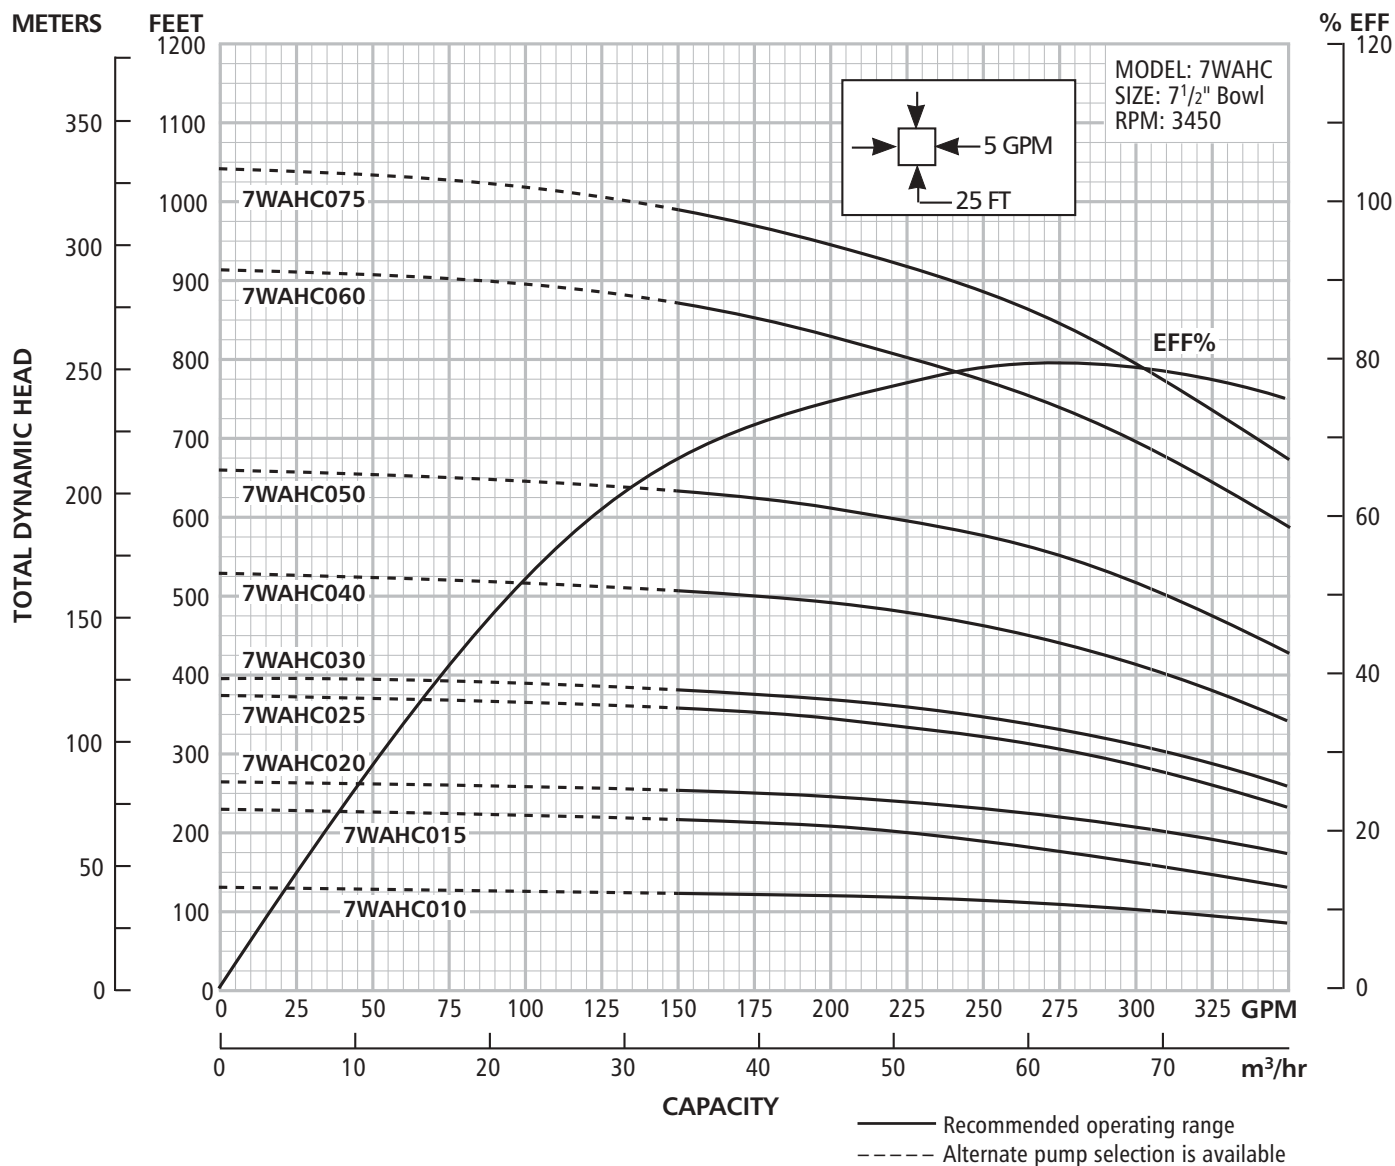


DIMENSIONS AND WEIGHTS

HP	Stages	W.E. Order Number	W.E. Length	W.E. Wt. (lbs.)
10	1	07WAHC01066ATS	22.0	68
15	2	07WAHC01566ATS	27.5	98
20	2	07WAHC02066ATS	27.5	98
25	3	07WAHC02566ATS	33.0	128
30	3	07WAHC03066ATS	33.0	128
40	4	07WAHC04066ATS	38.5	158
50	5	07WAHC05066ATS	44.0	188
60	7	07WAHC06066ATS	55.0	248
75	8	07WAHC07586ATS	60.5	290

(All dimensions in inches and weights in lbs. Do not use for construction purposes.)

PLEASE NOTE:

- Order motors separately.
- For intermediate horsepower pumps consult factory.
- Solid line is recommended operating range. The dotted line (---) signifies an alternate pump selection is available.
- Please specify all options changes in W.E. order number.

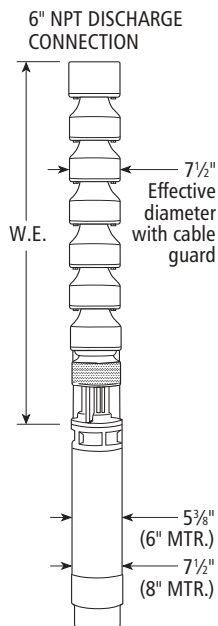

MATERIALS OF CONSTRUCTION

Part Name	Material
Shaft	ASTM A582 TYPE 416
Coupling	ASTM A582 S41600 CD
Suction Adapter	Ductile Iron ASTM A536
Discharge Bowl	ASTM A48 CL 30B
Rubber Bearings	RUBBER
Optional Bronze Bearings	ASTM B584
Discharge Bowl Bearing	ASTM B584
Taperlocks	ASTM A108 GR 101B
Bowl	ASTM A48 CL 30B
Upthrust Collar	Polyethylene
Impeller	ASTM B584
Fasteners	SAEJ429 GR 8
Cable Guard	ASTM A240 S 30400
Suction Strainer	ASTM A240 S 30400